

### **T206A1L SHOWER PANEL WITH TEMPERATURE & TIMED FLOW CONTROLS, EASY CLEAN SWIVEL SHOWER HEAD**

HORNE SHOWER PANEL WITH TEMPERATURE CONTROL LEVER ADJUSTMENT, TIMED FLOW CONTROL AND SWIVEL SHOWER HEAD

Includes integral HORNE thermostatic shower valve pre-plumbed within a white (RAL 9010) powder coated aluminium panel with push button timed flow control, lever temperature adjustment and easy clean swivel shower head in chromium plated finish.





#### **FEATURES & BENEFITS**

- Durable powder coated (RAL 9010) panel and robust fittings ensures long lifespan
- Pressure and performance tested pre-plumbed assembly
- Integral Horne TMV
- Easy clean swivel shower head
- Timed flow control for water and energy conservation (duration approx. 45 seconds)
- Lever operated temperature control
- 8 L/min flow regulator for water and energy conservation
- Highly suitable for retrofit applications
- Fast and easy installation
- Low level integral isolating service valves for ease of maintenance
- Optional Accessory:
  - \* pipe cover in same profile as panel



Dimensions in mm

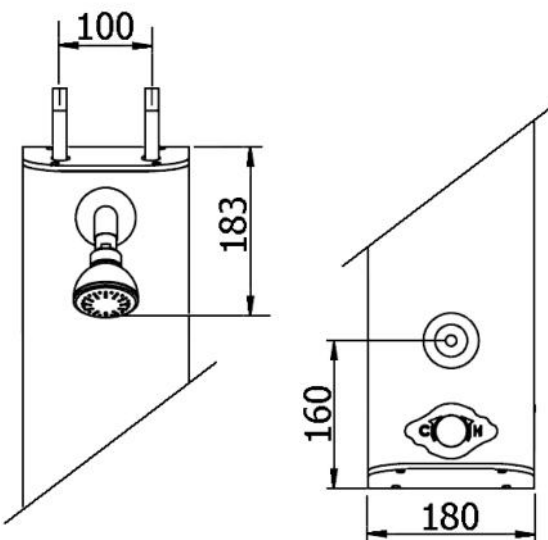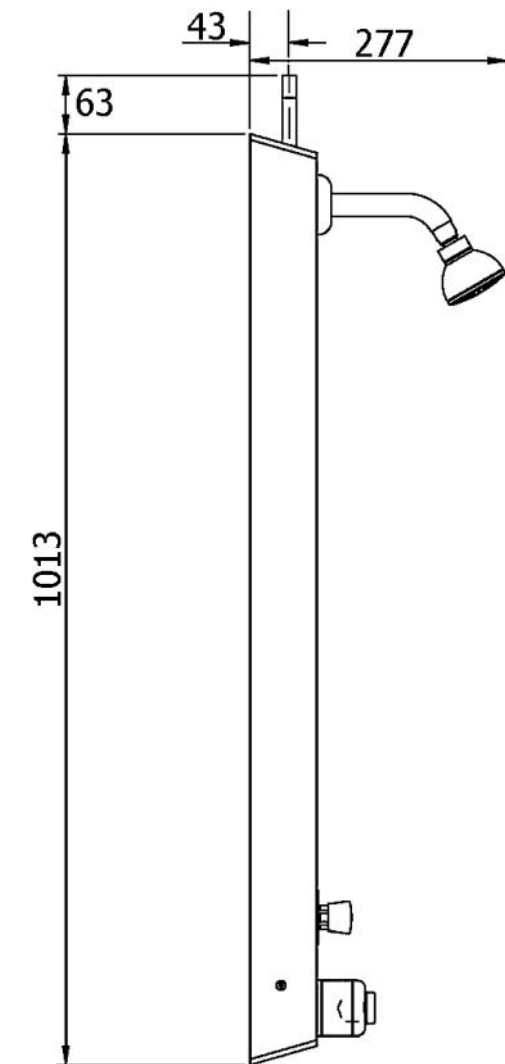

The T206A1L shower panel is pre-plumbed with an integral thermostatic mixing valve, which features:

- Low level isolating servicing valves
- Integral fine mesh strainers, which provide essential protection to the internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning

### Operating Conditions:

- Maximum mixed water temperature factory set to 41°C
- Range hot water supply temp: 52 - 85°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water temp. and mixed water temp.: 5°C
- Range of maintained water supply pressures: 0.5 — 5 bar

Hot and cold water pressures do not need to be equal. The lower of the two pressures, however, should not be less than 0.5 bar maintained at the shower head.

HORNE ENGINEERING LTD, P O BOX 7, Rankine Street, Johnstone, PA5 8BD.

Tel: +44 (0)1505 321455 Fax: +44 (0)1505 336287 Email: sales@horne.co.uk web: www.horne.co.uk