

Product datasheet: T306A

T306A SHOWER PANEL

HORNE SHOWER PANEL WITH PUSH BUTTON TIMED FLOW CONTROL & SWIVEL SHOWER HEAD

Includes integral TMV3 Scheme Approved HORNE 15 thermostatic mixing valve preplumbed within a white (RAL 9010) powder coated aluminium panel with push button timed flow control and easy clean swivel shower head in chromium plated finish.



FEATURES & BENEFITS

- Durable powder coated (RAL 9010) panel and robust fittings ensure long lifespan
- Pressure and performance tested pre-plumbed assembly
- Integral TMV3 Scheme Approved Horne 15 thermostatic mixing valve
- Fixed swivel shower head
- Timed flow control for water and energy conservation (approx. duration 45 seconds)
- Integral 8 L/min flow regulator for water and energy conservation
- Highly suitable for retrofit applications
- Fast and easy installation
- Integral low level isolating service valves for ease of maintenance
- Optional Accessory:
 - pipe cover in same profile as panel








The HORNE 15 thermostatic mixing valve is WRAS & TMV3 Scheme Approved.

Certificate No. FM 1224

HORNE

Product datasheet: T306A

Dimensions in mm

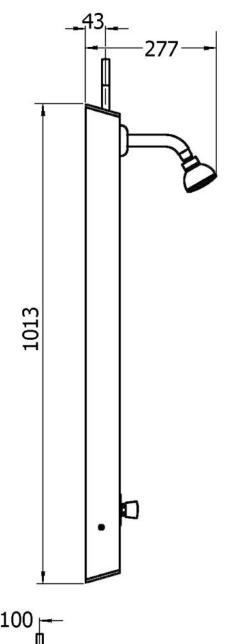

(

The T306A shower panel is pre-plumbed with an integral Type 3 and WRAS approved thermostatic mixing valve, which features:

- Low level servicing valves
- Integral fine mesh strainers provide essential protection to the internal mechanism of the valve & ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Flushing facility to allow water supplies to be flushed clean during commissioning
- Integral check valves prevent cross migration of water supplies

Operating Conditions:

- Mixed water temperature preset to 41°C
- Range of hot water supply temperature:
 52 85°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water temp. and mixed water temp.: 5°C
- Range of maintained water supply pressures: 0.5 — 5 bar

Hot and cold water pressures do not need to be equal. The lower of the two pressures, however, should not be less than 0.5 bar maintained at the shower head.

maintained at the shower head.

HORNE ENGINEERING LTD, PO BOX 7, Rankine Street, Johnstone, PA5 8BD. Tel: +44 (0)1505 321455 Fax: +44 (0)1505 336287 Email: sales@horne.co.uk web: www.horne.co.uk