

Sensorflow 21 Compact Tubular 23cm Panel Spout Integral Sensor, Battery

ILLUSTRATED

A4848 Sensorflow 21 compact 230mm panel mounted spout with integral sensor, 3.7 litre per minute aerated spray outlet, combined inline servicing valve and filter, battery

ILLUSTRATED PRODUCT DETAILS

Weights

A4848 2.20 KG

Finishes

A4848  Chrome (AA)

Materials

A4848 Chrome Plated Brass

Flow rates



A4848 4.7 Litres per minute @ 3 bar pressure

FINISH OPTIONS



Special Notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework). The downward pointing sensor is set to work in the normal handwashing position. This helps to eliminate false triggering from high visibility clothing associated with forward facing sensors, we also do not recommend the use of chromium plated wastes. Automatically shuts off if sensor is obstructed for a maximum of 55 seconds. Stand alone battery powered unit. Flow rate regulated to 3.7 litres per minute at 1 bar. Low pressure straightener available (A960860NU) which delivers 5 litres per minute at 0.1 bar.

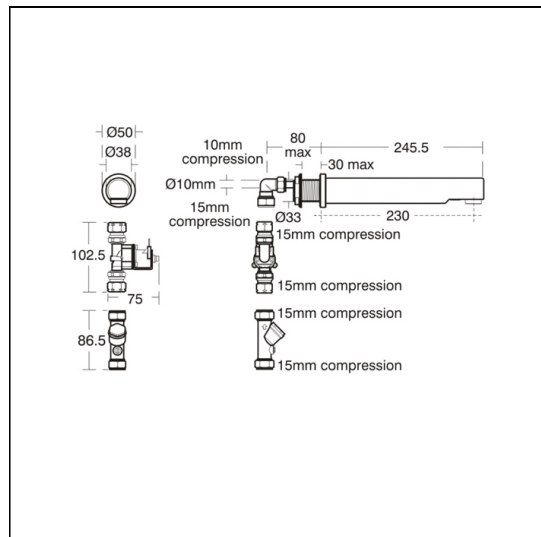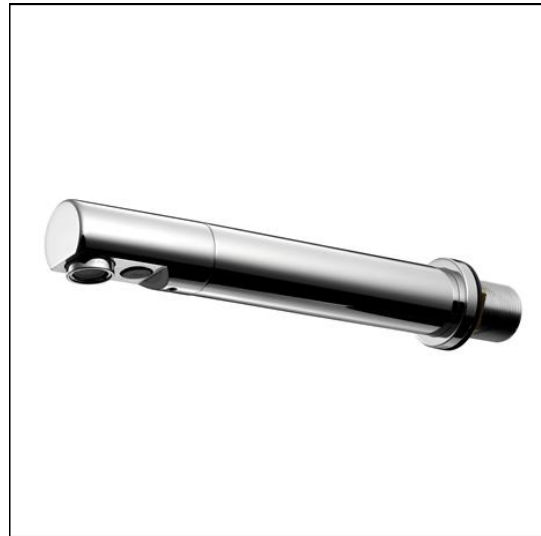

ACCREDITATIONS

A4848(AA)



FEATURES

